
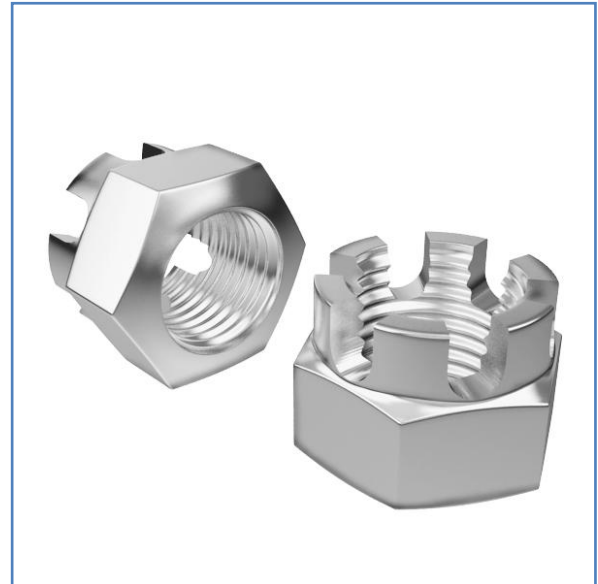


# Гайка корончатая, прорезная DIN 935

Прорезная, корончатая гайка, предназначенная для использования со ШПЛИНТОМ

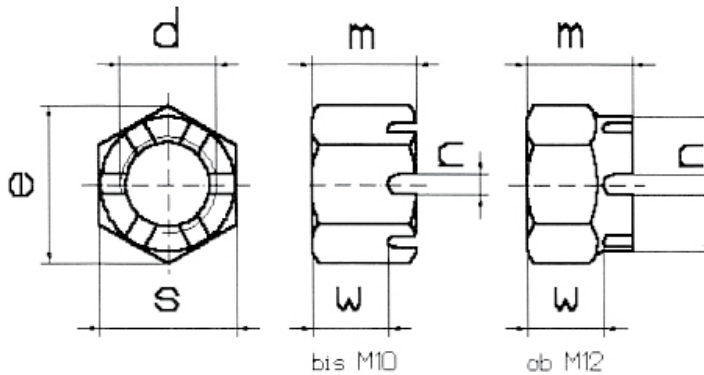

## Материалы:

- Сталь: 8, 10
- Сталь с покрытием: гальваническая оцинковка
- Нержавеющая сталь: A2, A4
- Цветные металлы, сплавы, пластик: латунь.

d		m	s	e	w	d		m	s	e	w
<b>M4</b>	0.7	5	7	7.66	2.9	<b>M36</b>	4	38	55	60.79	28.48
<b>M5</b>	0.8	6	8	8.79	3.7	<b>M39</b>	4	40	60	66.44	30.28
<b>M6</b>	1	7.5	10	11.05	4.7	<b>M42</b>	4.5	46	65	71.3	33.38
<b>M8</b>	1.25	9.5	13	14.38	6.14	<b>M45</b>	4.5	48	70	76.95	35.38
<b>M10</b>	1.5	12	17	17.77	7.64	<b>M48</b>	5	50	75	82.6	37.38
<b>M12</b>	1.75	15	19	20.03	9.64	<b>M52</b>	5	54	80	88.25	41.38
<b>M14</b>	2	16	22	23.35	10.57	<b>M56</b>	5.5	57	85	93.56	44.38
<b>M16</b>	2	19	24	26.75	12.57	<b>M60</b>	5.5	63	90	99.21	47.38
<b>M18</b>	2.5	21	27	29.56	14.57	<b>M64</b>	6	66	95	104.386	50.26
<b>M20</b>	2.5	22	30	32.95	15.57	<b>M68</b>	6	69	100	110.51	53.26
<b>M22</b>	2.5	26	32	35.03	17.57	<b>M72</b>	6	73	105	116.16	57.26
<b>M24</b>	3	27	36	39.55	18.48	<b>M76</b>	6	76	110	121.81	60.26
<b>M27</b>	3	30	41	45.2	21.48	<b>M80</b>	6	79	115	127.46	63.26
<b>M30</b>	3.5	33	46	50.85	23.48	<b>M90</b>	6	92	130	144.08	71.26
<b>M33</b>	3.5	35	50	55.37	25.48	<b>M100</b>	6	100	145	161.02	79.26